



Electric Heaters for Industry


Office Bitola:
+389 (0) 47 203330

Electrolux Macedonia
www.electrolux.mk
electrolux@t-home.mk

Office Skopje:
+389 (0) 2 3298130


PORCELAIN (CERAMIC) **ELECTRIC HEATER MONOPIPE for Galvanic bain**

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.700	1.500	600	400	200	64	3 Phase
960.701	1.750	700	500	200	64	3 Phase
960.702	2.000	800	600	200	64	3 Phase
960.703	2.500	900	700	200	64	3 Phase
960.704	2.750	1.000	800	200	64	3 Phase
960.705	3.000	1.100	900	200	64	3 Phase

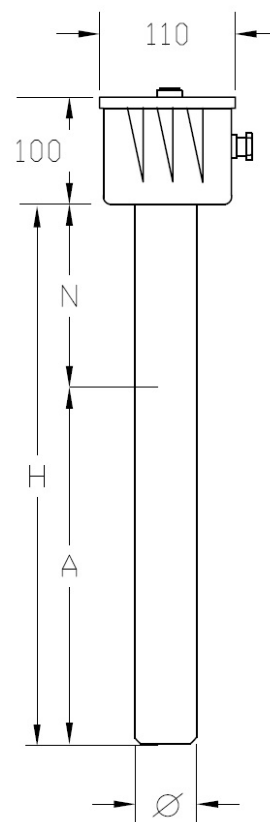


PORCELLAN (CERAMIC) **ELECTRIC HEATER MONOPIPE for Galvanic bain**

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960720N	630	315	220	95	54	1 phase
960721N	750	315	220	95	54	1 phase
960722N	750	400	270	130	54	1-3 phase
960723N	1000	400	270	130	54	1-3 phase
960724N	1000	500	350	150	54	1-3 phase
960725N	1450	500	350	150	54	1-3 phase
960726N	1300	630	450	180	54	1-3 phase
960727N	1300	630	350	280	54	1-3 phase
960728N	1600	630	450	180	54	1-3 phase
960729N	1600	630	350	280	54	1-3 phase
960730N	2000	630	450	180	54	1-3 phase
960731N	1600	800	550	250	54	1-3 phase
960732N	1600	800	350	450	54	1-3 phase
960733N	2000	800	550	250	54	1-3 phase
960734N	2000	800	450	350	54	1-3 phase
960735N	2500	800	550	250	54	1-3 phase
960736N	2000	1000	720	280	54	1-3 phase
960737N	2000	1000	550	450	54	1-3 phase
960738N	2500	1000	720	280	54	1-3 phase
960739N	2500	1000	550	450	54	1-3 phase
960740N	3150	1000	720	280	54	1-3 phase
960741N	3500	1000	720	280	54	1-3 phase
960742N	2800	1250	870	330	54	1-3 phase
960743N	2800	1250	720	530	54	1-3 phase
960744N	3500	1250	870	330	54	1-3 phase
960745N	4000	1250	870	330	54	1-3 phase
960746N	3500	1500	1120	380	54	1-3 phase
960747N	4500	1500	1120	380	54	3 phase
960748N	6000	1500	1120	380	54	3 phase

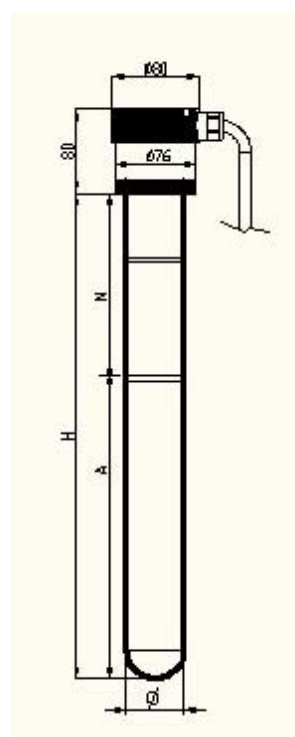


PORCELAIN (CERAMIC) **ELECTRIC HEATER MONOPIPE for Galvanic bain**

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.598	300	280	80	200	32	1 Phase
960.599	500	350	150	200	32	1 Phase
960.600	800	400	200	200	32	1 Phase
960.601	1.000	500	300	200	32	1 Phase
960.602	1.500	600	400	200	32	1 Phase
960.603	1.750	700	500	200	32	1 Phase
960.604	2.000	800	600	200	32	1 Phase
960.605	2.500	900	700	200	32	1 Phase
960.606	2.750	1.000	800	200	32	1 Phase
960.607	3.000	1.100	900	200	32	1 Phase

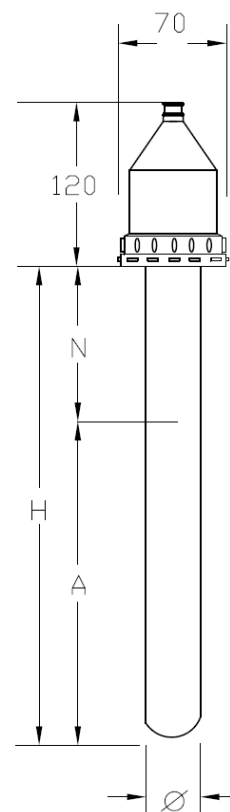


PIREX (SPECIAL GLASS) **ELECTRIC HEATER MONOPIPE for Galvanic bain**

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.960	1.500	600	400	200	60	3 Phase
960.961	1.750	700	500	200	60	3 Phase
960.962	2.000	800	600	200	60	3 Phase
960.963	2.500	900	700	200	60	3 Phase
960.964	2.750	1.000	800	200	60	3 Phase
960.965	3.000	1.100	900	200	60	3 Phase

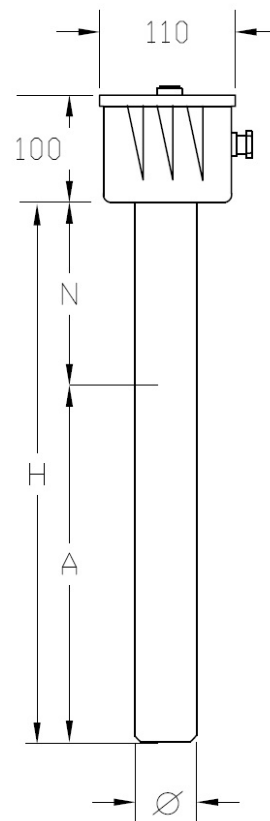


PIREX (SPECIAL GLASS) ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960970N	630	315	220	95	54	1 phase
960971N	750	315	220	95	54	1 phase
960972N	750	400	270	130	54	1-3 phase
960973N	1000	400	270	130	54	1-3 phase
960974N	1000	500	350	150	54	1-3 phase
960975N	1450	500	350	150	54	1-3 phase
960976N	1300	630	450	180	54	1-3 phase
960977N	1300	630	350	280	54	1-3 phase
960978N	1600	630	450	180	54	1-3 phase
960979N	1600	630	350	280	54	1-3 phase
960980N	2000	630	450	180	54	1-3 phase
960981N	1600	800	550	250	54	1-3 phase
960982N	1600	800	350	450	54	1-3 phase
960983N	2000	800	550	250	54	1-3 phase
960984N	2000	800	450	350	54	1-3 phase
960985N	2500	800	550	250	54	1-3 phase
960986N	2000	1000	720	280	54	1-3 phase
960987N	2000	1000	550	450	54	1-3 phase
960988N	2500	1000	720	280	54	1-3 phase
960989N	2500	1000	550	450	54	1-3 phase
960990N	3150	1000	720	280	54	1-3 phase
960991N	3500	1000	720	280	54	1-3 phase
960992N	2800	1250	870	330	54	1-3 phase
960993N	2800	1250	720	530	54	1-3 phase
960994N	3500	1250	870	330	54	1-3 phase
960995N	4000	1250	870	330	54	1-3 phase
960996N	3500	1500	1120	380	54	1-3 phase
960997N	4500	1500	1120	380	54	3 phase
960998N	6000	1500	1120	380	54	3 phase

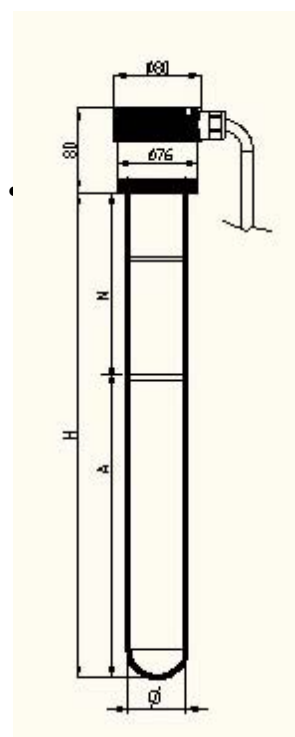

PIREX (SPECIAL GLASS) **ELECTRIC HEATER MONOPIPE for Galvanic bain**


CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.650	300	280	80	200	32	1 Phase
960.651	500	350	150	200	32	1 Phase
960.652	800	400	200	200	32	1 Phase
960.653	1.000	500	300	200	32	1 Phase
960.654	1.500	600	400	200	32	1 Phase
960.655	1.750	700	500	200	32	1 Phase
960.656	2.000	800	600	200	32	1 Phase
960.657	2.500	900	700	200	32	1 Phase
960.658	2.750	1.000	800	200	32	1 Phase
960.659	3.000	1.100	900	200	32	1 Phase

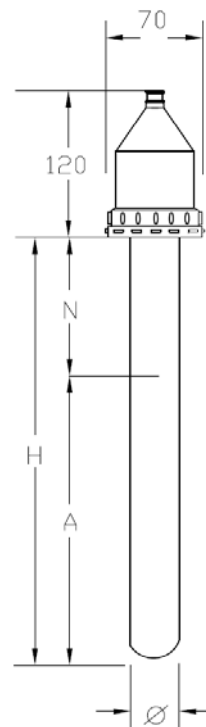

QUARZ GLASS

ELECTRIC HEATER MONOPIPE for Galvanic bain


CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960420N	630	315	220	95	51	1 phase
960421N	750	315	220	95	51	1 phase
960422N	1000	315	220	95	51	1-3 phase
960423N	750	400	220	95	51	1-3 phase
960424N	1000	400	270	130	51	1-3 phase
960425N	1450	400	270	130	51	1-3 phase
960426N	1000	500	350	150	51	1-3 phase
960427N	1000	500	270	220	51	1-3 phase
960428N	1450	500	350	150	51	1-3 phase
960429N	1450	500	300	150	51	1-3 phase
960430N	1600	500	350	150	51	1-3 phase
960431N	2000	500	350	150	51	1-3 phase
960432N	1300	630	450	180	51	1-3 phase
960433N	1300	630	350	280	51	1-3 phase
960434N	1600	630	450	180	51	1-3 phase
960435N	2000	630	450	180	51	1-3 phase
960436N	1600	630	350	280	51	1-3 phase
960437N	2000	630	350	280	51	1-3 phase
960438N	2500	630	450	180	51	1-3 phase
960439N	3150	630	450	180	51	1-3 phase
960440N	1600	800	550	250	51	1-3 phase
960441N	1600	800	350	450	51	1-3 phase
960442N	2000	800	550	250	51	1-3 phase
960443N	2000	800	350	450	51	1-3 phase
960444N	2500	800	550	250	51	1-3 phase
960445N	2500	800	450	350	51	1-3 phase
960446N	3150	800	550	250	51	1-3 phase
960447N	3500	800	550	250	51	1-3 phase
960448N	2000	1000	720	280	51	1-3 phase
960449N	2000	1000	350	650	51	1-3 phase
960450N	2500	1000	720	280	51	1-3 phase
960451N	2500	1000	550	450	51	1-3 phase
960452N	3150	1000	720	280	51	1-3 phase
960453N	3500	1000	550	450	51	1-3 phase
960454N	3500	1000	720	280	51	1-3 phase
960455N	5000	1000	720	280	51	1-3 phase
960456N	6000	1000	720	280	51	1-3 phase
960457N	2800	1250	870	380	51	1-3 phase
960458N	3500	1250	870	380	51	1-3 phase
960459N	4000	1250	870	380	51	1-3 phase
960460N	5000	1250	870	380	51	1-3 phase
960461N	3500	1600	1120	480	51	1-3 phase
960462N	4500	1600	1120	480	51	1-3 phase
960463N	6000	1600	1120	480	51	3 phase
960464N	4000	2000	1390	610	51	3 phase
960465N	5000	2000	1390	610	51	3 phase
960466N	6000	2000	1390	610	51	3 phase

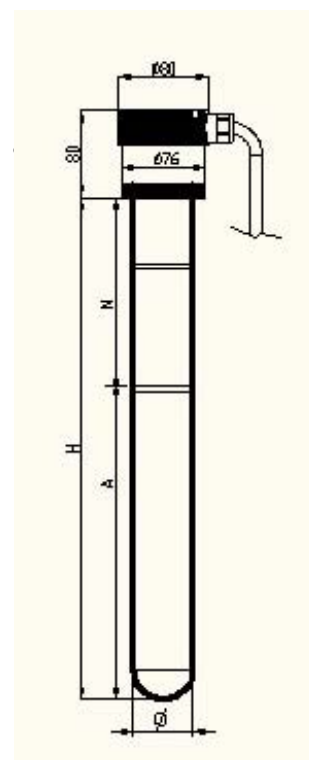

QUARZ


ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.399	500	350	150	200	32	1 Phase
960.400	800	400	200	200	32	1 Phase
960.401	1.000	500	300	200	32	1 Phase
960.402	1.500	600	400	200	32	1 Phase
960.403	1.750	700	500	200	32	1 Phase
960.404	2.000	800	600	200	32	1 Phase
960.405	2.500	900	700	200	32	1 Phase
960.406	2.750	1.000	800	200	32	1 Phase
960.407	3.000	1.100	900	200	32	1 Phase

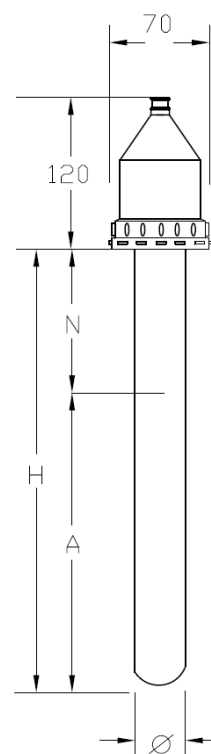


TITANIUM ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960910	630	315	220	95	45	1-3 phase
960911	750	315	220	95	45	1-3 phase
960912	1000	315	220	95	45	1-3 phase
960913	500	350	250	100	45	1-3 phase
960914	750	350	250	100	45	1-3 phase
960915	750	400	270	130	45	1-3 phase
960916	750	400	220	180	45	1-3 phase
960917	1000	400	270	130	45	1-3 phase
960918	1450	400	270	130	45	1-3 phase
960919	750	450	350	100	45	1-3 phase
960920	1000	450	350	100	45	1-3 phase
960921	1000	500	350	150	45	1-3 phase
960922	1000	500	270	230	45	1-3 phase
960923	1450	500	350	150	45	1-3 phase
960924	1450	500	300	200	45	1-3 phase
960925	1600	500	350	150	45	1-3 phase
960926	2000	500	350	150	45	1-3 phase
960927	1000	600	450	150	45	1-3 phase
960928	1500	600	450	150	45	1-3 phase
960929	1300	630	450	180	45	1-3 phase
960930	1300	630	350	280	45	1-3 phase
960931	1600	630	450	180	45	1-3 phase
960932	2000	630	450	180	45	1-3 phase
960933	1600	630	350	280	45	1-3 phase
960934	2000	630	350	280	45	1-3 phase
960935	2500	630	450	180	45	1-3 phase
960936	1600	800	550	250	45	1-3 phase

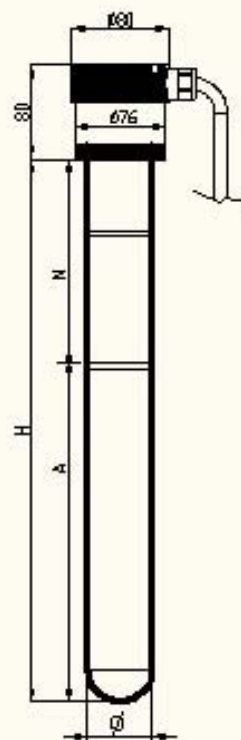


960937	1600	800	350	450	45	1-3 phase
960938	2000	800	550	250	45	1-3 phase
960939	2000	800	350	450	45	1-3 phase
960940	2500	800	550	250	45	1-3 phase
960941	2500	800	450	350	45	1-3 phase
960942	3150	800	550	250	45	1-3 phase
960943	3500	800	600	200	45	1-3 phase
960944	2000	800	600	200	45	1-3 phase
960945	2500	800	600	200	45	1-3 phase
960946	2000	1000	720	280	45	1-3 phase
960947	2000	1000	350	650	45	1-3 phase
960948	2500	1000	720	280	45	1-3 phase
960949	2500	1000	550	450	45	1-3 phase
960950	3150	1000	720	280	45	1-3 phase
960951	3500	1000	600	400	45	1-3 phase
960952	3500	1000	720	280	45	1-3 phase
960953	3000	1000	800	200	45	1-3 phase
960954	2800	1250	870	330	45	1-3 phase
960955	3500	1250	870	330	45	1-3 phase
960956	4000	1250	870	330	45	1-3 phase
960957	5000	1250	870	330	45	1-3 phase
960958	3500	1600	1120	480	45	1-3 phase
960959	4500	1600	1120	480	45	1-3 phase
960960	6000	1600	1120	480	45	1 phase
960961	4000	2000	1390	610	45	1 phase
960962	5000	2000	1390	610	45	1 phase
960963	6000	2000	1390	610	45	1 phase
960964	4500	2500	1740	760	45	1 phase
960965	6300	2500	1740	760	45	1 phase
960966	5000	3150	2190	960	45	1 phase
960967	7000	3150	2190	960	45	1 phase

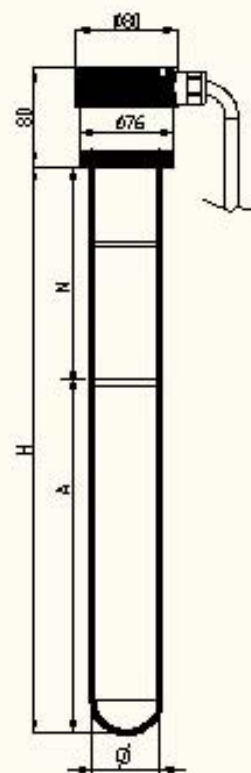


TITANIUM ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960970	1800	500	300	200	54	1-3 phase
960971	1600	500	350	150	54	1-3 phase
960972	2000	500	350	150	54	1-3 phase
960973	1600	630	450	180	54	1-3 phase
960974	2000	630	450	180	54	1-3 phase
960975	2500	630	450	180	54	1-3 phase
960976	3150	630	450	180	54	1-3 phase
960977	2500	630	350	280	54	1-3 phase
960978	2000	630	300	330	54	1-3 phase
960979	2600	800	550	250	54	1-3 phase
960980	2000	800	300	500	54	1-3 phase
960981	3000	800	550	250	54	1-3 phase
960982	3500	800	550	250	54	1-3 phase
960983	2500	800	350	450	54	1-3 phase
960984	3150	1000	720	280	54	1-3 phase
960985	3150	1000	550	450	54	1-3 phase
960986	3500	1000	720	280	54	1-3 phase
960987	4000	1000	720	280	54	1-3 phase
960988	4500	1000	720	280	54	1-3 phase
960989	3500	1250	870	380	54	1-3 phase
960990	3500	1250	720	530	54	1-3 phase
960991	4000	1250	870	380	54	1-3 phase
960992	4500	1250	870	380	54	1-3 phase
960993	5000	1250	870	380	54	1-3 phase
960994	4500	1600	1120	480	54	1-3 phase
960995	4500	1600	870	730	54	1-3 phase
960996	5000	1600	1120	480	54	1-3 phase
960997	5000	1600	870	730	54	1-3 phase
960998	6000	1600	1120	480	54	3 phase

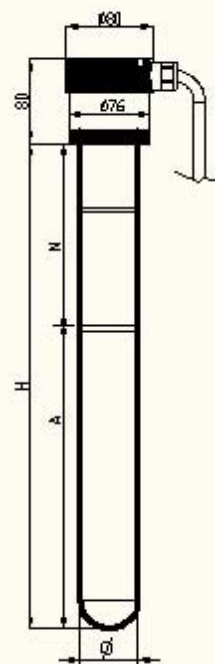


TITANIUM **ELECTRIC HEATER MONOPIPE for Galvanic bain**

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.800	800	370	170	200	25,4	1 Phase
960.801	1.000	500	300	200	25,4	1 Phase
960.802	1.500	600	400	200	25,4	1 Phase
960.803	1.750	700	500	200	25,4	1 Phase
960.804	2.000	800	600	200	25,4	1 Phase
960.805	2.500	900	700	200	25,4	1 Phase
960.806	2.750	1.000	800	200	25,4	1 Phase
960.807	3.000	1.100	900	200	25,4	1 Phase

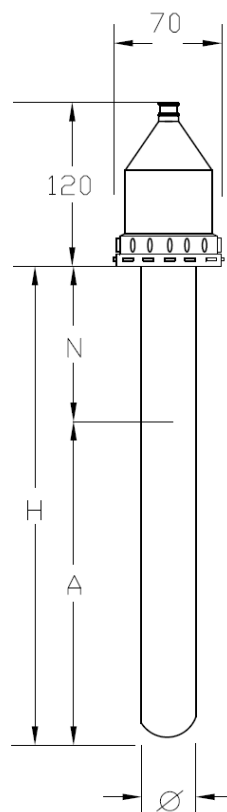


TITANIUM ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.900	1.500	600	350	250	50,8	3 Phase
960.901	2.000	700	450	250	50,8	3 Phase
960.902	2.500	800	550	250	50,8	3 Phase
960.903	3.000	900	650	250	50,8	3 Phase
960.904	3.500	1.000	750	250	50,8	3 Phase
960.905	4.000	1.100	850	250	50,8	3 Phase

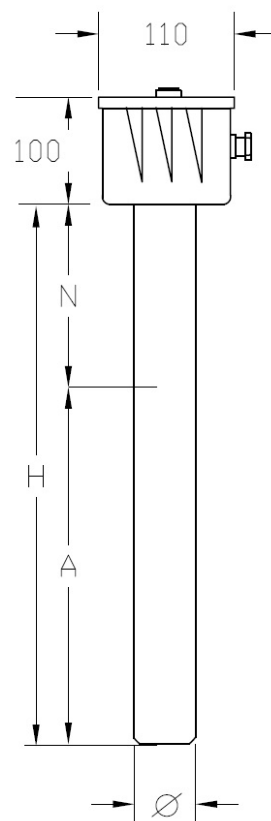


ST.ST.316 Ti ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
990991	1800	500	300	200	54	1 phase
990991	1600	500	350	150	54	1-3 phase
990991	2000	500	350	150	54	1-3 phase
990991	1600	630	450	180	54	1-3 phase
990991	2000	630	450	180	54	1-3 phase
990991	2500	630	450	180	54	1-3 phase
990991	3150	630	450	180	54	1-3 phase
990991	2500	630	350	280	54	1-3 phase
990991	2000	630	300	330	54	1-3 phase
990991	2600	800	550	250	54	1-3 phase
990991	2000	800	300	500	54	1-3 phase
990991	3000	800	550	250	54	1-3 phase
990991	3500	800	550	250	54	1-3 phase
990991	2500	800	350	450	54	1-3 phase
990991	3150	1000	720	280	54	1-3 phase
990991	3150	1000	550	450	54	1-3 phase
990991	3500	1000	720	280	54	1-3 phase
990991	4000	1000	720	280	54	1-3 phase
990991	4500	1000	720	280	54	1-3 phase
990991	3500	1250	870	330	54	1-3 phase
990991	3500	1250	720	530	54	1-3 phase
990991	4000	1250	870	330	54	1-3 phase
990991	4500	1250	870	330	54	1-3 phase
990991	5000	1250	870	330	54	1-3 phase
990991	4500	1600	1120	480	54	1-3 phase
990991	4500	1600	870	730	54	1-3 phase
990991	5000	1600	1120	480	54	1-3 phase
990991	5000	1600	870	730	54	3 phase
990991	6000	1600	1120	480	54	3 phase

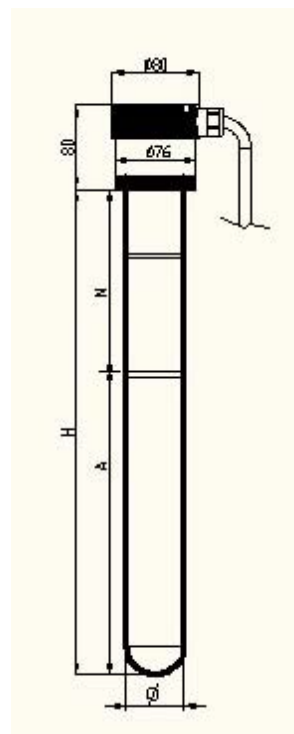


ST.ST.316 Ti ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
990990	630	315	220	95	44,5	1-3 phase
990990	750	315	220	95	44,5	1-3 phase
990990	1000	315	220	95	44,5	1-3 phase
990990	500	350	250	100	44,5	1-3 phase
990990	750	350	250	100	44,5	1-3 phase
990990	750	400	270	130	44,5	1-3 phase
990990	750	400	220	180	44,5	1-3 phase
990990	1000	400	270	130	44,5	1-3 phase
990990	1450	400	270	130	44,5	1-3 phase
990990	750	450	350	100	44,5	1-3 phase
990990	1000	450	350	100	44,5	1-3 phase
990990	1000	500	350	150	44,5	1-3 phase
990990	1000	500	270	230	44,5	1-3 phase
990990	1450	500	350	150	44,5	1-3 phase
990990	1450	500	300	200	44,5	1-3 phase
990990	1600	500	350	150	44,5	1-3 phase
990990	2000	500	350	150	44,5	1-3 phase
990990	1000	600	450	150	44,5	1-3 phase
990990	1500	600	450	150	44,5	1-3 phase
990990	1300	630	450	180	44,5	1-3 phase
990990	1300	630	350	280	44,5	1-3 phase
990990	1600	630	450	180	44,5	1-3 phase
990990	2000	630	450	180	44,5	1-3 phase
990990	1600	630	350	280	44,5	1-3 phase
990990	2000	630	350	280	44,5	1-3 phase
990990	2500	630	450	180	44,5	1-3 phase
990990	1600	800	550	250	44,5	1-3 phase

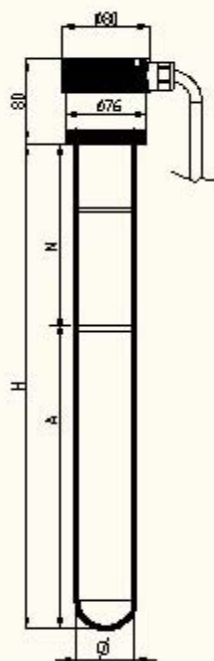


990990	2000	800	550	250	44,5	1-3 phase
990990	2000	800	350	450	44,5	1-3 phase
990990	2500	800	550	250	44,5	1-3 phase
990990	2500	800	450	350	44,5	1-3 phase
990990	3150	800	550	250	44,5	1-3 phase
990990	3500	800	600	200	44,5	1-3 phase
990990	2000	800	600	200	44,5	1-3 phase
990990	2500	800	600	200	44,5	1-3 phase
990990	2000	1000	720	280	44,5	1-3 phase
990990	2000	1000	350	550	44,5	1-3 phase
990990	2500	1000	720	280	44,5	1-3 phase
990990	2500	1000	550	450	44,5	1-3 phase
990990	3150	1000	720	280	44,5	1-3 phase
990990	3500	1000	600	400	44,5	1-3 phase
990990	3500	1000	720	280	44,5	1-3 phase
990990	3000	1000	800	200	44,5	1-3 phase
990990	2800	1250	870	380	44,5	1-3 phase
990990	3500	1250	870	380	44,5	1-3 phase
990990	4000	1250	870	380	44,5	1-3 phase
990990	5000	1250	870	380	44,5	1-3 phase
990990	3500	1600	1120	480	44,5	1-3 phase
990990	4500	1600	1120	480	44,5	1-3 phase
990990	6000	1600	1120	480	44,5	3 phase
990990	4000	2000	1390	610	44,5	3 phase
990990	5000	2000	1390	610	44,5	3 phase
990990	6000	2000	1390	610	44,5	3 phase
990990	4500	2500	1740	760	44,5	3 phase
990990	6300	2500	1740	760	44,5	3 phase
990990	5000	3150	2190	960	44,5	3 phase
990990	7000	3150	2190	960	44,5	3 phase

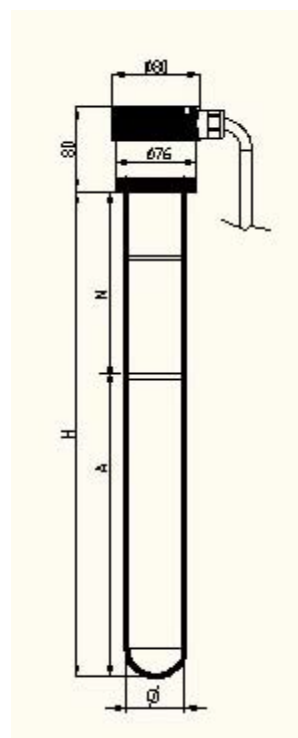


ST.ST. 316L / 304L ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.450	1.000	500	250	250	32	1 Phase
960.451	1.500	600	350	250	32	1 Phase
960.452	2.000	700	450	250	32	1 Phase
960.453	2.500	800	550	250	32	1 Phase
960.454	3.000	900	650	250	32	1 Phase
960.455	3.500	1.000	750	250	32	1 Phase
960.456	4.000	1.100	850	250	32	1 Phase

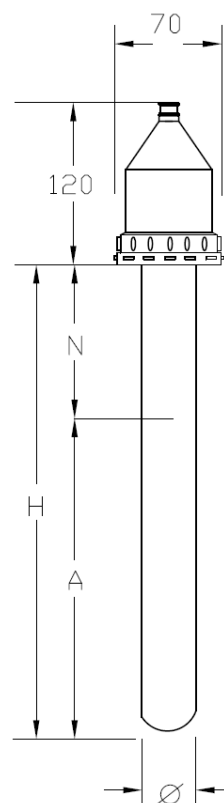


ST.ST. 316L / 304L ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.500	1.000	500	250	250	54	3 Phase
960.501	1.500	600	350	250	54	3 Phase
960.502	2.000	700	450	250	54	3 Phase
960.503	2.500	800	550	250	54	3 Phase
960.504	3.000	900	650	250	54	3 Phase
960.505	3.500	1.000	750	250	54	3 Phase
960.506	4.000	1.100	850	250	54	3 Phase

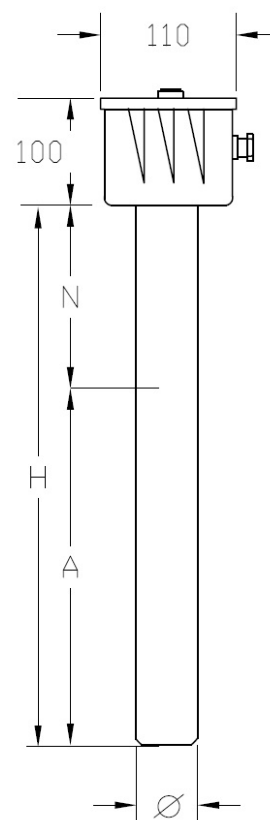

TEFLON® ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
990994	400	315	220	95	49	1 phase
990994	630	400	270	130	49	1 phase
990994	750	450	350	100	49	1 phase
990994	1000	500	350	150	49	1-3 phase
990994	1000	600	450	150	49	1-3 phase
990994	1250	630	450	180	49	1-3 phase
990994	1600	800	550	250	49	1-3 phase
990994	1400	800	600	200	49	1-3 phase
990994	2000	1000	720	280	49	1-3 phase
990994	2000	1000	800	200	49	1-3 phase
990994	2500	1250	870	330	49	1-3 phase
990994	3150	1600	1120	480	49	1-3 phase
990994	4000	2000	1390	610	49	3 phase
990994	5000	2500	1740	760	49	3 phase
990994	7000	3150	2190	960	49	3 phase

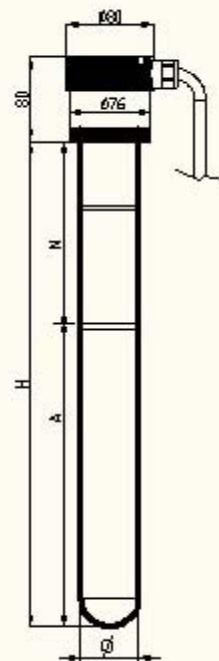

TEFLON[®] ELECTRIC HEATER MONOPIPE for Galvanic bain

CODE	POWER	H (length)	A (heat)	N (cold)	Ø mm	VOLTAGE
960.300	1.000	500	250	250	55	3 Phase
960.301	1.500	600	350	250	55	3 Phase
960.302	2.000	700	450	250	55	3 Phase
960.303	2.500	800	550	250	55	3 Phase
960.304	3.000	900	650	250	55	3 Phase
960.305	3.500	1.000	750	250	55	3 Phase
960.306	4.000	1.100	850	250	55	3 Phase

